# JM Series 15



Your recycling needs. Our grinding solutions.

Technical moulds, reinforced materials, no fine parts, minimum noise level, uniform regrind material, easy maintenance. The new JM Series 15 is suitable for runners recovery in-line with injection moulding machines and scraps.



Solid rotor to grant a proper noise level in injection moulding department.



Integrated funnel and screen-holder to get better dust-tight.



Grinding chamber in 550HV antiwear execution.



Ω

0

Easy and tool free access from one side only for ordinary maintenance.



Easy to handle with limited lateral foot print to reduce the space between presses.

# JM Series 15

#### **FEATURES JM 2115**

Feeding opening (mm): 210 x 140 Nr. rotating / fixed knives: 3 / 2 Rotor speed (RPM): 300 Rotor diameter (mm): 150 Motor (kW): 1,5 Weight (kg): 170 Standard screen (mm): 5 Indicative throughput (kg/hr): 10 ÷ 20 Discharge piping Ø 38 mm (lt): 5


### FEATURES JM 4215

Feeding opening (mm): 420 x 140 Nr. rotating / fixed knives: 3 / 2 Rotor speed (RPM): 300 Rotor diameter (mm): 150 Motor (kW): 1,5 Weight (kg): 230 Standard screen (mm): 5 Indicative throughput (kg/hr): 20 ÷ 40 Discharge piping Ø 38 mm (lt): 8


#### OPTIONAL


- A) Knives in antiwear execution
- B) Screen with inclined holes Ø 5 (mm)
- C) Special voltages/frequencies
- D) Level control for funnel
- E) Raised version
- F) Lowered version
- G) Day bin for regrind material (40 lt)
- H) Level control for regrind material day bin
- I) Venturi regrind material transport system


## DIMENSIONS

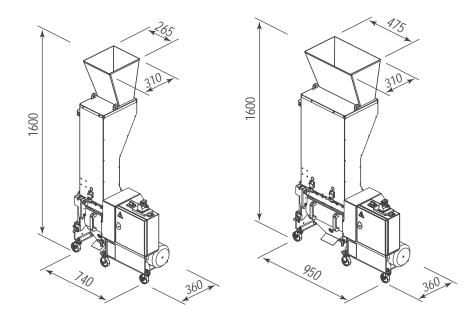

#### ACCESSORIES

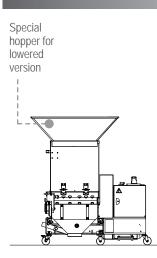

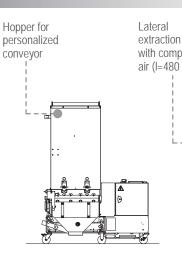



(h=2000 mm) for box, bag, or metallic day bin



TRIA Italy www.triaplastics.com TRIA America TRIA Brazil TRIA China TRIA Germany